


SCHERTLER

Schertler SA
Via Beroldingen 18
6850 Mendrisio
Switzerland
T +41 (0)91 630 07 10
F +41 (0)91 630 07 11

info@schertler.swiss
www.schertler.swiss
Facebook @schertler.sa
Instagram @schertleraudio
Youtube @Schertler SA
#shareyourschertler

Scan the QR code
to open
the USER GUIDE



THANK YOU
FOR
CHOOSING
SCHERTLER

YELLOW SINGLE
QUICK GUIDE V1

QUICK START

CONNECTIONS

Connect microphones to the XLR input or instruments to the 1/4" jack socket. Remember to engage the PHANT button when using condenser microphones and DYN P48 contact microphones or the +10V when using STAT pickups or other electrostatic microphones.

LEVEL SET UP

Start to play (or sing) and turn the GAIN up until the OL red LED starts to blink, from there turn it back down a little. Now open the MASTER between 30% and 50% then finally adjust the CHANNEL VOLUME as needed.

If at first use there is no sound, check that the MUTE

EXTERNAL EFFECTS


You can use external effects in parallel via the SEND and RETURN jack connections

If you want to put the YELLOW at the beginning of an effects chain, simply use the UNBALANCED MASTER output.


WARNING: the ground connection must be provided by the device to which YELLOW is connected. See the USER GUIDE for more info.

USER GUIDE available at www.schertler.com


CONNECTIONS

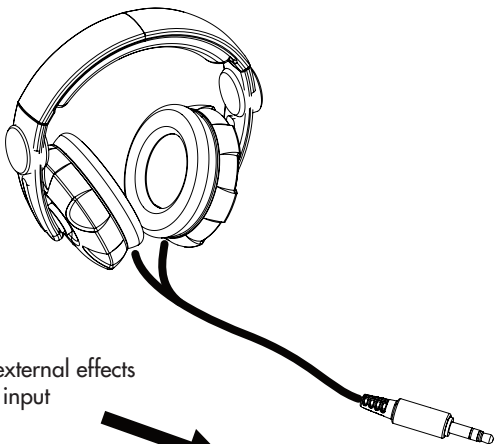


FROM external effects
or LINE input

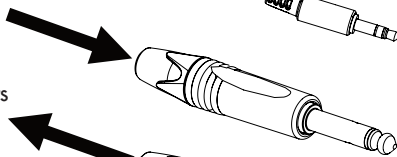



TO external effects
output



Instruments input

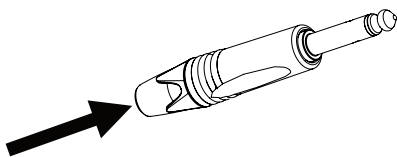

Microphones input
(condenser or dynamic)
or DYN contact microphones

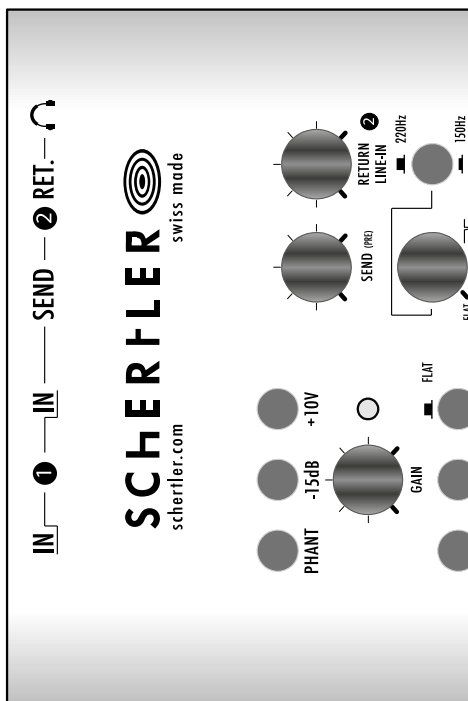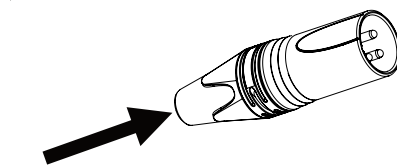

CONNECTIONS

ACOUSTIC
CLASS-A PREAMP
SINGLE II


YELLOW

WARM LOW LOW MID HIGH CUT
HIGH MID HIGH


VOLUME 1
MASTER VOLUME
MUTE

DC 24V DI OUT
POWER SUPPLY


MASTER OUTPUTS
BALANCED UNBALANCED

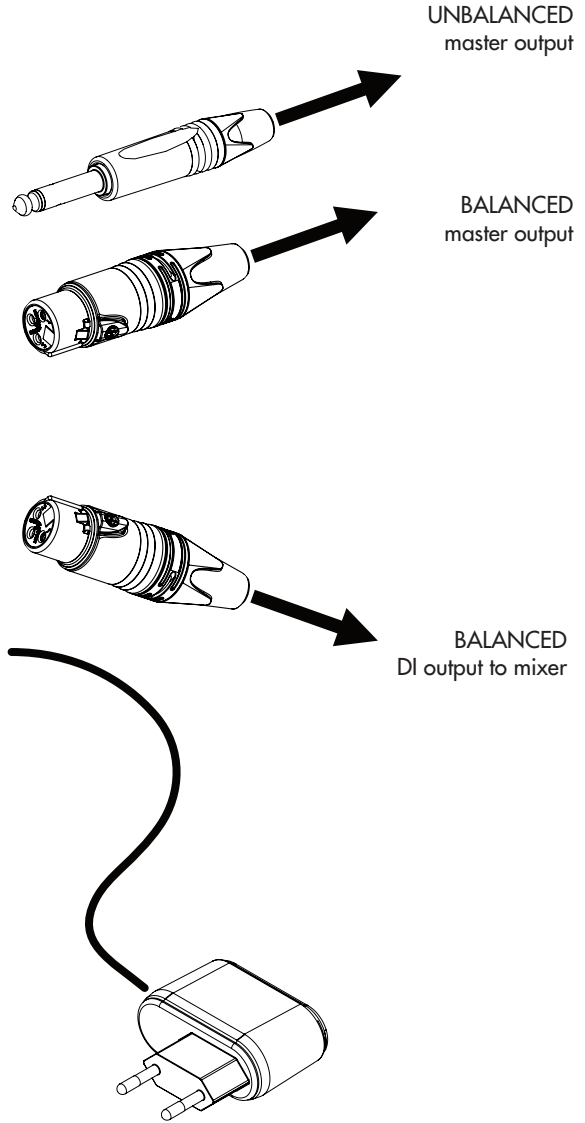


RELATED PRODUCTS

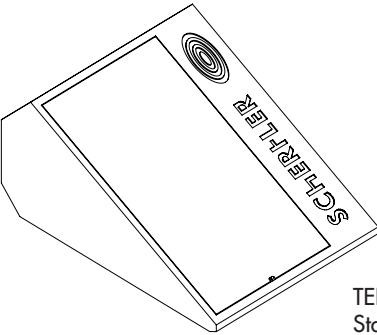


TEDDY
Stage monitor

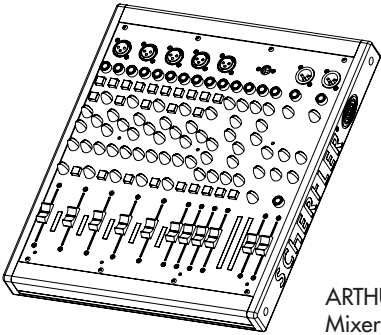


ARTHUR
Mixer




DYN P48
contact
microphones




STAT
pickups




PS W 24V
power supply



CA JM JM
1/4" jack cable



CA XF XM
XLR cable



ACOUSTIC
Amps