

# SCHERFLER




THANK YOU
FOR
CHOOSING
SCHERTLER



# **CONNECTIONS**

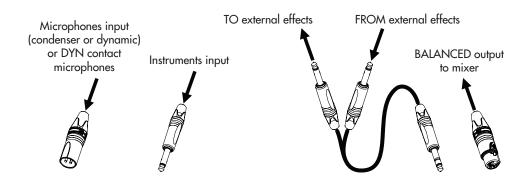

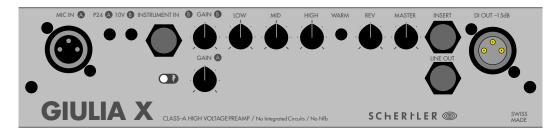



## **QUICK START**

### TURN ON THE AMP

Set the MASTER volume and both GAIN potentiometer completely closed.

Connect the power cable to mains and switch on the amp.

If a ground noise (hum at 50-60Hz) is present, flip the ground lift switch (GND LIFT) on the rear panel.

### CONNECTIONS

You can use simultaneously the MIC channel (XLR) and the INSTRUMENT channel (1/4" jack). Remember to activate the P24 phantom power on the MIC with condenser microphones and DYN P48 contact microphones or the 10V on the INSTRUMENT with STAT or other electrostatic microphones.

### **LEVELS SET UP**

Open the MASTER between 30% and 50% then start to raise the GAIN potentiometer. If the sound starts to get distorted, turn the GAIN back a little. Now adjust again the MASTER as needed.

### **OTHER FEATURES**


Once the levels are properly set, you can shape your sound with the EQ and the WARM filter and set the amount of REVERB you want on your MASTER output.


### **EXTERNAL EFFECTS**

You can connect external effect using a Y cable: connect the stereo jack to the INSERT socket and the two mono jacks to the input and output of the external pedal.

USER MANUAL available online at www.schertler.com

# **RELATED PRODUCTS**

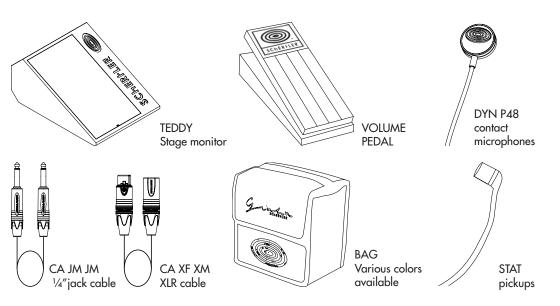

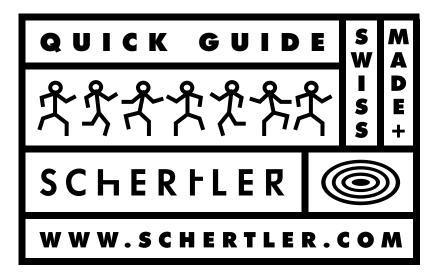

Schertler SA Via Beroldingen 18 6850 Mendrisio Switzerland T +41 (0)91 630 07 10 F +41 (0)91 630 07 11

info@schertler.swiss www.schertler.swiss Facebook @schertler.sa Instagram @schertleraudio Youtube @Schertler SA #shareyourschertler Scan the QR code to open the USER MANUAL

