SCHERFLER



Schertler SA Via Beroldingen 18 6850 Mendrisio Switzerland T +41 (0)91 630 07 10 F +41 (0)91 630 07 11 Scan the QR code to open the USER GUIDE

info@schertler.swiss www.schertler.swiss Facebook @schertler.sa Instagram @schertleraudio Youtube @Schertler SA #shareyourschertler



THANK YOU FOR CHOOSING SCHERTLER



QUICK START

CONNECTIONS

Connect microphones to the XLR input and instruments to the 1/4'' jack socket. Remember to engage the PHANT button on CHANNEL 1 when using condenser microphones and DYN P48 contact microphones or the +10V on CHANNEL 2 when using STAT pickups or other electrostatic microphones.

LEVEL SET UP

Start to play (or sing) and turn the GAIN up until the OL red LED starts to blink, from there turn it back down a little. Now open the MASTER between 30% and 50% then finally adjust the CHANNEL VOLUME

as needed.

EXTERNAL EFFECTS


You can use external effects in parallel to both channels via the SEND and RETURN connections and independently set the amount of signal to send for each channel.

If you want to put the YELLOW at the beginning of an effects chain, simply use the UNBALANCED MASTER output.


WARNING: the ground connection must be provided by the device to which YELLOW BLENDER is connected. See the USER GUIDE for more info.


USER GUIDE available at www.schertler.com

CONNECTIONS

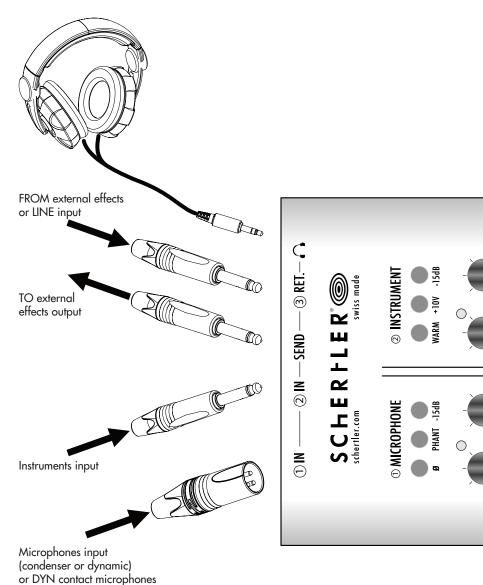


CONNECTIONS

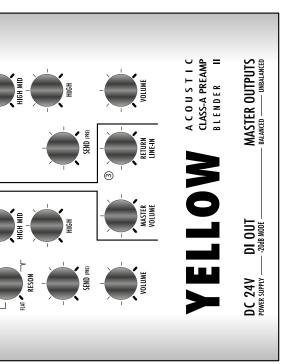



UNBALANCED



RELATED PRODUCTS

