


**SCHERTLER**



**THANK YOU  
FOR  
CHOOSING  
SCHERTLER**

**ROY X**  
QUICK GUIDE V1

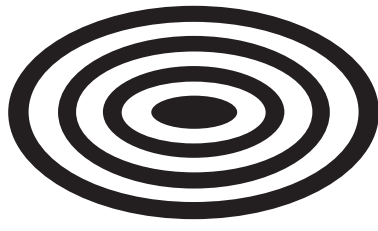

# QUICK START

## TURN ON THE AMP

Check the MASTER volume, GAIN and channel VOLUME pots are completely closed or the MUTE is engaged. Connect the power cable to mains and switch on the amp.

If a ground noise (hum at 50-60Hz) occurs, flip the ground lift switch (GND LIFT) on the rear panel.

## CONNECTIONS

Connect microphones to the XLR or instruments to the 1/4" jack sockets. Remember to activate the P48 phantom power on the XLR when using condenser microphones and DYN P48 contact microphones or the 10V on the 1/4" jacks when using STAT pickups or other electrostatic microphones. LINE signals can be connected via the stereo 1/8" jack.

## LEVELS SET UP

Playing (or singing) loud, turn the GAIN up until the OL red LED starts to blink, from there turn it back down a little. Now open the MASTER between 30% and 50% finally adjust CHANNEL VOLUME as needed.

## OTHER FEATURES

Once the levels are properly set, you can shape your sound with the EQ and the WARM filter (on ch. 1) or cut the selectable 150 Hz or 240 Hz with the RESON notch filter (on ch.2) and set the amount of REVERB you want on each channel and its return on the MASTER. The LOW CUT button will high pass the signal to the MASTER.


## EXTERNAL EFFECTS

You can connect external effects on the MASTER (affecting all channels) using a Y-cable: connect the stereo 1/4" jack to the INSERT socket and the two mono 1/4" jacks to the input and output of the external pedal.


In alternative, for parallel connection, connect the AUX OUT to the external effect's input and the return from the effect into ch. 5. Set the amount of signal you want to send to the effect with the REV/AUX pot of each channel. If you don't want to use the internal reverb module, simply turn the REVERB MASTER down to zero.

USER GUIDE available online at [www.schertler.com](http://www.schertler.com)

# RELATED PRODUCTS




TEDDY  
Stage monitor



VOLUME  
PEDAL




DYN P48  
contact  
microphones




CA JM JM  
1/4" jack cable

CA XF XM  
XLR cable



BAG



STAT  
pickups

**Q U I C K   G U I D E**

**S  
W  
I  
S  
S**

**M  
A  
D  
E  
+**



**S C H E R T L E R**



**W W W . S C H E R T L E R . C O M**

Schertler SA  
Via Beroldingen 18  
6850 Mendrisio  
Switzerland  
T +41 (0)91 630 07 10  
F +41 (0)91 630 07 11

info@schertler.swiss  
www.schertler.swiss  
Facebook @schertler.sa  
Instagram @schertleraudio  
Youtube @Schertler SA  
#shareyourschertler

Scan the QR code to open  
the USER MANUAL

